


Forklift loader

LT28T 轮式叉装机

可叉装物料28T
Fork lifting and loading capacity 28T

优越性能 Powerful performance

- ◆越 野—综合了越野叉车与装载机的优势，并系统加强、提升。
- ◆强 悍—两前轮胎可支撑26000kg，加强后的轮胎可支撑32000kg，叉起重量≤28T。
- ◆安 全—整车系统加强与驾驶空间的安全设计，安全架的使用。
- ◆节 能—国内工程机械最高档的潍柴发动机，内带多项专利及特有技术，省油、高效又耐用。
- ◆多 功能—货叉与铲斗两用，安全架、护栏与驾驶室可分开亦可合并使用，实现一机多用。

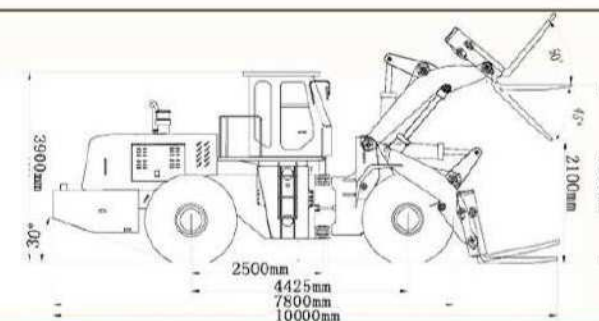

- Cross-country—Integrating advantages between cross-country forklift and wheel loader, which strengthened and improved systematically.
- Stronger—The two front rims can load 32000kg, the max. lifting load reaches 28T.
- Safe—The strengthened whole mechanical system and cabin safety design with safe guard.
- Energy-saving—With multinomial patents and special technology, fuelefficient and high efficiency and durable.

参数及外形尺寸 Main technical performances and parameters

项目 Description	参数 Specifications	
发动机额定功率 Rated power	178kw	
外形尺寸 (长×宽×高) Overall dimension (L×W×H)	10000x3300x3900mm	
最大提升高度 Max. lifting height	3400mm	
操作质量 Operating weight	35000kg	
最大限荷 Max. Limited Load	28000kg (举升高度1800mm)	
铲斗容量 Bucket capacity	3.0m ³	
货叉规格 Dimensions of fork	长×宽×高 (L×W×H)	1700x350x1420mm
	货叉距 Distance of fork	1220mm
	额定载荷 Rated loading capacity	28000kg
转向角度 Turning angle	± 35°	
最小转弯半径 Turning radius	7250mm	
轴距 Wheel base	4425mm	
轮距 Tread	2300mm	
最小离地间隙 Min. Ground clearance	530mm	
卸载角 Unloading angle	15.3°	
运料位置高度 (物料离地高) Haul location height (Ground clearance of material)	300mm	
最大行驶速度 Max. travelling speed	38km/h	
满载时最大提升速度 Max speeds lifting with load	33m/min	
轮胎规格 Specification of tyre	前轮 Front wheel	贵州“前进”高负荷三颗星26.5钢丝胎
	后轮 Rear wheel	贵州“前进”26.5加强胎或者二颗星26.5钢丝胎